Hisense

See how our Air Conditioners would look in your home with our Augmented Reality App.

Scan code with you smartphone came to learn more.



Air Conditioning

A Breath of Fresh Air

J SERIES

170

()

Pushing the boundaries of innovation since 1969

For 5 decades we have been committed to developing innovations in consumer electronics. Today, we are a world leading electronics manufacturer employing over 80,000 people across 54 companies as well as boasting 12 research & development centres worldwide. All of which have the sole aim of delivering high quality, cutting-edge and affordable products that improve the life of our consumers.





Hisense



Everything we create is designed with you in mind.

All Hisense air conditioning products are built to last and designed to withstand the demands of modern lifestyles. This dedication to developing and producing cutting-edge technology has seen us present generations of the latest air conditioning products and features, such as expert-level Inverter Technology and Smart Home Voice Controls. We want you to have control of your climate for maximum comfort air at home.

Our commitment to quality.

We want you to love your Hisense products. Not just when you first buy them, but for years and years to come – that's why quality is so important to us.

Whether it's our stringent Quality Improvement Process, our commitment to excellent aftersales customer service or the reassurance of our comprehensive warranties, it's all done to make sure you feel confident that a Hisense product is the right choice for your home.

5 YEAR WARRANTY ON PARTS AND LABOUR

Peace of mind knowing we have you covered with Hisense's 5-year parts and labour warranty for all split system air conditioners. Refer to the warranty card included with your product for full details.

MEPS COMPLIANT

All Hisense Air Conditioners sold in Australia meet Minimum Energy Performance Standards (MEPS) as set by the Australian Government.

HISENSE CUSTOMER CARE

Need help or advice on a Hisense product? Choose one of the following ways to contact our Hisense Customer Care team.







Split System **Air Conditioners**

A Hisense Reverse Cycle Air Conditioner offers the best of both worlds, keeping your home chilled in summer and warm in winter. Reverse Cycle Air Conditioning units work by absorbing heat energy from the outside air and transferring the heat into your home.

This dual functionality makes it ideal for seasonal climates that have cold winters and warm summers. The I Series collection has several models available in varying capacities, including 2.5kW, 3.5kW, 5.3kW, 7.1kW and 8kW outputs, making it suitable for any room in your home.

★ TOP FEATURES

ConnectLife App Control Smart Home Voice Control Inverter Technology Eco Mode

I FEEL Mode Quiet Mode Silver Ion Filter Self Cleaning

R32 Refrigerant Fast Cooling 4D Auto-swing Anti-corrosion Design



Voice Control for an Easier Life


When the air conditioner is connected to Wi-Fi, you can operate it using voice control through Google Home or Amazon Alexa. This allows you to use verbal commands to set modes, adjust temperatures and more.

For example, if you have an Google Assistant enabled Wi-Fi Control air conditioner installed in your Lounge named 'Lounge',

Ask your Google Assistant... "Hey Google, turn on the Lounge to 24" "Hey Google, what is the Lounge set to?" "Hey Google, set the Lounge to 21" "Hey Google, turn off the Lounge"



- Support by Google Assistant and Alexa
- Language: English, French, German, Italian, Spanish

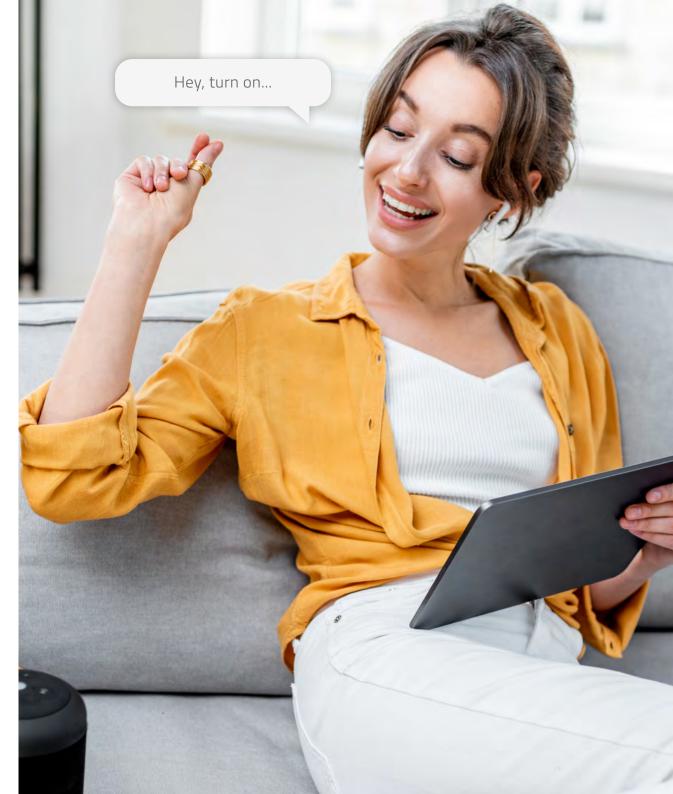

ConnectLife

Ξ

Start here

Add appliances

You can do many things with your appliances.

Connect and Explore

Enter APP Menu

Select Air Conditioner

 Set mode, temperature, air flow, etc WiFi

Wireless Connectivity for Cool Convenience

With Wi-Fi connectivity you can control the air conditioner through the Hisense ConnectLife app. This allows you to view menus, select modes, and set temperatures from anywhere.





High Energy Efficiency

By using 360° full DC inverter technology and an inner air duct and advanced louver fin, the unit offers a significant boost in energy efficiency, reducing power consumption.





Fast Cooling


Through advanced Hisense inverter technology, the compressor can reach the highest frequency in a short time to achieve fast cooling.

Not only does it have advanced inverter technology and compressors, the ACs also have powerful fans, advanced air ducts and efficient heat exchange systems, so as to achieve 3 times the rapid cooling of the non-inverter air conditioners, allowing users to cool down quickly after turning on the unit.

±0.5°C Inverter

The inverter air conditioner can continuously adjust the operating frequency of the compressor.

When AC is turned on, the air conditioner will quickly increase the operating frequency to reach the set temperature, and then it will operate at a low frequency to keep the room temperature constant.

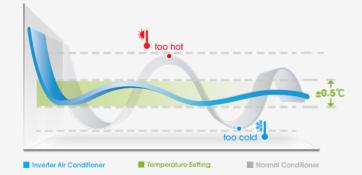




ECO MODE Keep Cool, Without the Bill Shock

With the push of a button, you can select Eco Mode which allows you to minimise power consumption, saving up to 30% more energy than an ordinary inverter AC.

Be Comfortable Exactly Where You Are

Hisense Air Conditioning units are intuitive and intelligent. With I FEEL Mode, you'll never have to adjust the temperature yourself. The Hisense Air Conditioning remote features a built-in digital thermometer that adjusts the temperature of the room based on where the remote is located.

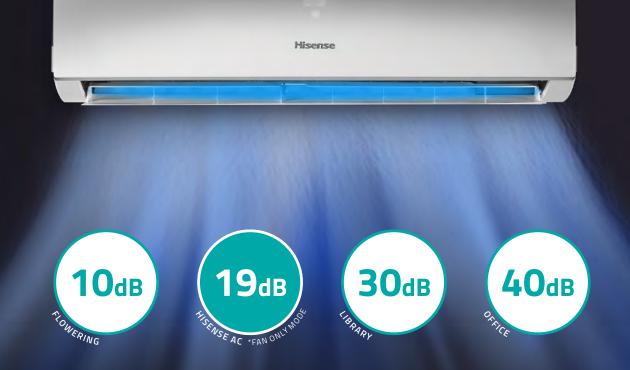



Peace, Comfort and Quiet


Quiet Mode allows the unit to operate silently without compromising on power output or effectiveness.

The silent motor achieves superb airflow distribution while creating a cool, quiet and comfortable environment.



Cleans the Air and Cleans Itself

Hisense patented self-clean technology reduces the need for cleaning and maintenance and extends the life of your AC unit, allowing you to enjoy superb air quality for longer. Simply select the function from the remote control and let the unit do the rest.

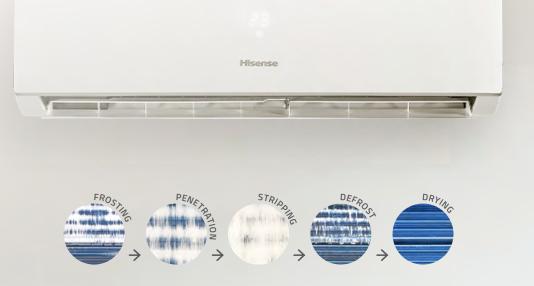







Clean, Safe Air

Every Hisense Air Conditioning unit features a Silver Ion Filter, which is an antibacterial device that helps to keep the air free from bacteria and impurities. The filter prevents the build up of mould and is 99.99% effective in preventing E. coli, and 97.14% effective at preventing S. aureus, which is more commonly known as Staph.





4D Auto-Swing

4D Auto-Swing technology controls air distribution to make sure that temperatures remain stable and that air is never felt being directly gusting at you.







R32 Refrigerant

Ultra-low energy consumption, effective power saving, non-toxic and environmentally friendly.

R32 has a lower Global Warming Potential (GWP) or 675 compared to R410A GWP of 2,088. R32 is also a zero Ozone Depletion Potential (ODP) refrigerant, minimising the effects on the ozone layer.



Durable Design


Hisense Air Conditioning units, designed to be durable and long-lasting, also have the feature of excellent anti-corrosion capability. A specially treated anti-corrosion fin provides a protection level of more than 9.8 times than non-treated fins, and it can withstand a 1500hour salt spray test.

The seven-layer anti-corrosion protection consists of a double zinc layer, double zinc-iron soluble layer, steel substrate, powder solidified layer, and a ceramic coating, which significantly extends the service life of the outdoor unit. Anti-corrosion treatment is applied on core components to fastening parts.



Anti-Corrosion Golden Fin

Hisense's unique Anti-Corrosive Golden Fin can withstand all sorts of weather conditions, from salty air to rain and other corrosive elements.



7-layer Anti-Corrosion Protection

7-Layer Anti-Corrosion Protection greatly extends the service life of outdoor units due to increased strength and durability.



J Series

	MODEL NAME	HAWJ9KR	HAWJ12KR	HAWJ18KR	HAWJ24KR	HAWJ28KR
CLEAN AIR	Silver Ion Filter		\checkmark	\checkmark	\checkmark	\checkmark
	Self Cleaning		\checkmark	\checkmark	\checkmark	\checkmark
SMART FUNCTIONS	WiFi Enabled		\checkmark	\checkmark	\checkmark	\checkmark
	ConnectLife App Control	Android/ iOS				
	Google Assistant Voice Control		\checkmark	\checkmark	\checkmark	\checkmark
	Alexa Voice Control		\checkmark	\checkmark	\checkmark	\checkmark
COMFORT & CONVENIENCE FUNCTIONS	Omni-directional Air Flow		\checkmark	\checkmark	\checkmark	\checkmark
	Vertical Auto Swing Louvre		\checkmark	\checkmark	\checkmark	\checkmark
	Horizontal Auto Swing Louvre	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
	Memory Louvre		\checkmark	\checkmark	\checkmark	\checkmark
	I FEEL Mode		\checkmark	\checkmark	\checkmark	\checkmark
	Quiet Mode		\checkmark	\checkmark	\checkmark	\checkmark
	Smart Mode		\checkmark	\checkmark	\checkmark	\checkmark
	Fast Cooling		\checkmark	\checkmark	\checkmark	\checkmark
	Fast Heating		\checkmark	\checkmark	\checkmark	\checkmark
	Long-distance Airflow		\checkmark	\checkmark		
	5 Fan Speed		\checkmark	\checkmark	\checkmark	\checkmark
	Auto Fan Speed		\checkmark	\checkmark	\checkmark	\checkmark
	On/Off Timer		\checkmark	\checkmark	\checkmark	\checkmark
	24 Hours Timer	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
	Auto Restart	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
	LED Display	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
	Dimmer Function	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
	LCAC Wired Controller	\checkmark	\checkmark	\checkmark	\checkmark	N/A
ENERGY EFFICIENT FUNCTIONS	Inverter Technology	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
	Eco Mode	\checkmark	\checkmark	\checkmark		\checkmark
	R32 refrigerant	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
	Demand Enabled Response (DRED)	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
	Removable Cover Panel	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
MAINTENANCE	Washable PP Filter	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
& PREVENTION	Anti-corrosive Design	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark
FUNCTIONS	Auto Defrosting	\checkmark	\checkmark	\checkmark	\checkmark	
	Self-Diagnostic Function	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark

SPECIFICATIONS J Series

HAWJ9KR-I HAWJ12KR-I HAWJ18KR-I HAWJ24KR-I HAWJ9KR-O HAWJ12KR-O HAWJ18KR-O HAWJ24KR-O	HAWJ28KR-I HAWJ28KR-O
INDOOR UNIT Index Index HAWJ9KR-0 HAWJ12KR-0 HAWJ18KR-0	
	HAWJ28KR-O
	HAWJ28KR-O
TYPE Reverse Cycle Reverse Cycle Reverse Cycle Reverse Cycle	Reverse Cycle
COOL Cooling Capacity W 2500 (800~3200) 3500 (1200~3700) 5300 (1600~6000) 7100 (2200~7900)	8000 (2300~8800)
COOL Cooling Capacity Rated Input-Cooling W 2500 (800-3200) 622 3500 (1200-3700) 900 5300 (1600-6000) 1590 7100 (2200-7900) 2150 HEAT Heating Capacity Rated Input-Heating W 3100 (1000-4000) 3800 (1000-4500) 5400 (1750-6700) 7200 (2100-8000) HEAT Heating Capacity Rated Input-Heating W 690 890 1450 7200 (2100-8000) ENERGY STAR RATING Average 4 3 3.5 2.5 2.5 2 3.5 2.5 Cool 4.55 2 3.55 2 3 1.5 3.5 1.5	2460
Heating Capacity W 3100 (1000-4000) 3800 (1000~4500) 5400 (1750~6700) 7200 (2100~8000)	8000 (3000~10000)
O Rated Input-Heating W 690 890 1450 2100	2460
Hot 4.5 3.5 4 3 3 2.5 3.5 2.5	3 3
Image ENERGY STAR RATING Average 4 3 3.5 2.5 2 3 2	3 2.5
	3 1.5
Moisture Removal L/H.r 0.9 0.9 2 2.5	2.5
Vertical and the second seco	1250/1200/1050/1000/ 900/800/400
Image: Distance m 10 13 14	14
EER W/W 4.03 3.89 3.33 3.30	3.25
COP W/W 4.49 4.27 3.72 3.43	3.25
By Dir	
Refrigerant (Type/kg) R32/0.7 R32/0.8 R32/1.15 R32/1.4	R32/1.58
O High Fan Speed (dB (A)) 39 41 44 48	47
	32 19
Solution Control of the control of	68
Year Year <th< td=""><td></td></th<>	
Rated Current (Cooling) (Amp.) 2.8 (0.7~5.5) 4.1 (1.8~7.3) 7.2 (2.0~12.0) 9.6 (2.0~18.3)	11 (2.8~16.5)
Rated current (Heating) (Amp.) 3.1 (0.8~6.4) 4.1 (1.6~7.9) 6.5 (1.8~12.0) 9.4 (2.0~20.5)	11 (3.3~18.5)
Expansion Device Capillary Capillary Capillary Capillary	EEV (Electronic Expansion Valve)
Evaporator Copper tube and Aluminium Fin Copper tube and Alumi	Copper tube and Aluminium Fin
Condenser Copper tube and Aluminium Fin	Copper tube and Aluminium Fin
Piping Connection (Liquid line) inch 1/4 1/4 1/4 3/8	3/8
Piping Connection (Gas line) inch 3/8 3/8 1/2 5/8	5/8
Max Vertical Height Diff. between O.U. and I.U. m 20/10 25/10 30/20 30/20	40/20
Pre-charged Length m 10 10 10 10	5
Net Dimensions WxHxD (mm) 815×270×212 815×270×212 915×315×235 1085×315×235	1085×315×235
Net Weight (Kg) 8.5 8.5 12.5 13.5	13
INDOOR Packing Dimensions WxHxD (mm) 870×335×265 870×335×265 1000×390×315 1170×390×315	1170x390x315
Gross Weight (Kg) 11 11 14.5 16	16
Net Dimensions WxHxD (mm) 780×540×260 780×540×260 810x585x280 860x650x310	900×750×340
Net Weight (Kg) 25.5 28 34 43.5	52
OUTDOOR Packing Dimensions WxHxD (mm) 910×600×360 910×600×360 940x630X385 995x720x420	1060×820×450
Gross Weight (Kg) 28 30 37 47.5	56

